# **Under Bridge Inspection Unit**

## 16m Telescopic Bucket

### **UBI 3**



15

10

#### **Machine Specs**

Max reach under bridge	13 m
Max reach alongside bridge	2 - 20 m
Max lowering depth	16 m
Dimension of basket	1.4 x 1.2 m
Side walk clearance (at max barrier height)	1.5 m
Side walk clearance (at min barrier height)	3.3 m
Hand rail / Barrier max clearance	5.8 m
Set up width required on bridge	2.5 m
Safe working load	250 kg
Rotation of basket under bridge	180° degrees
Deployment side	Left / right
Max Bucket Lift Height	1.8 m


### **Truck Specs**

Traveling height (stowed)	4 m
Traveling width	2.5 m
Traveling length	11 m
Overall weight (approx)	23,000 kg

m = Metre kg = Kilogram

#### **Additional Equipment**

- · Generator 6KVA
- · Screw Compressor 60CFM

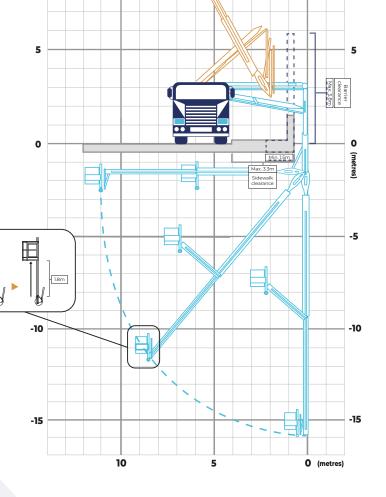

0488 020,070

15

10