

**DOWN UNDER
BRIDGE
UNITS**



Rates & Specifications for all our Under Bridge Units



www.dubu.net.au

Down Under Bridge Units Pty Ltd

P: 0488 020 070

E: info@dubu.net.au

ABN: 13 622 334 990

P: PO Box 239 West Burleigh QLD 4219

A: 3 Rudman Parade, Burleigh Heads QLD 4220

Rates for 2022



Unit Description	Quantity	Wet Hire Daily Rate (excl GST)
4m Aichi Platform Under Bridge Maintenance Unit / UBM 10	1	\$2392.00 - (\$299 per hr)
7m Moog Platform Under Bridge Maintenance Unit / UBM 4 & 6	2	\$2392.00 - (\$299 per hr)
7m Moog Platform Under Bridge Maintenance Unit - Industrial / UBM 2	1	\$2392.00 - (\$299 per hr)
9m Moog Platform Under Bridge Maintenance Unit - Industrial / UBM 9	1	\$2600.00 - (\$325 per hr)
10.5m Barin Platform Under Bridge Maintenance Unit - Industrial / UBM 1	1	\$2600.00 - (\$325 per hr)
13.5m Barin Platform Under Bridge Maintenance Unit - Industrial / UBM 11	1	\$2808.00 - (\$351 per hr)
14m Moog Platform Under Bridge Maintenance Unit / UBM 5	1	\$2808.00 - (\$351 per hr)
14m Moog Platform Under Bridge Maintenance Unit - Industrial / UBM 7 & 8	2	\$2808.00 - (\$351 per hr)
18m Cella Telescopic Bucket Under Bridge Inspection Unit / UBI 1 & 2	1	\$2392.00 - (\$299 per hr)
16m Moog Telescopic Bucket Under Bridge Inspection Unit / UBI 3	1	\$2808.00 - (\$351 per hr)

- Minimum hire is 8 hours. After 8 hours, applicable daily rate + overtime applies.
- Overtime rate = "Truck hourly rate" plus \$70 per hour (+ GST) applies to hire on weekends, and between the hours of 5pm to 6.30am and any hire over 8 continuous hours. Public Holidays is \$105 per hour (+GST)
- Minimum call out during the day (0630-1700) or night (1700-0630) is 8 hours including travel time.
- Travel outside the local regional depot area is at 8 hours minimum.
- Travel is subject to overtime rate.
- Toll Fees Apply
- 'Living Away from Home Allowance = \$325.00 (+ GST)

www.dubu.net.au

Down Under Bridge Units Pty Ltd

P: 0488 020 070

E: info@dubu.net.au

ABN: 13 622 334 990

P: PO Box 239 West Burleigh QLD 4219

A: 3 Rudman Parade, Burleigh Heads QLD 4220

Under Bridge Maintenance Unit




2.5 - 4 Metre Aichi Platform

UNIT NUMBER: UBM 10

General Specs

Platform length	2.5 - 4 m
Max lowering depth	4 m
Max vertical height	4.9 m
Max horizontal width	3.2 m
Width of platform	1 m
Max load at end of telescopic platform	125 kg
Safe working load across platform	250 kg
Rotation of platform	180°
Set up width required on bridge	2.3 m
Travelling height (stowed)	4.2 m
Travelling width	2.3 m
Travelling length	8.5 m
Overall weight (approx)	10,400 kg
Dual control truck	No
Deployment side	left / right and rear
Outriggers	Yes
Side walk extension	No

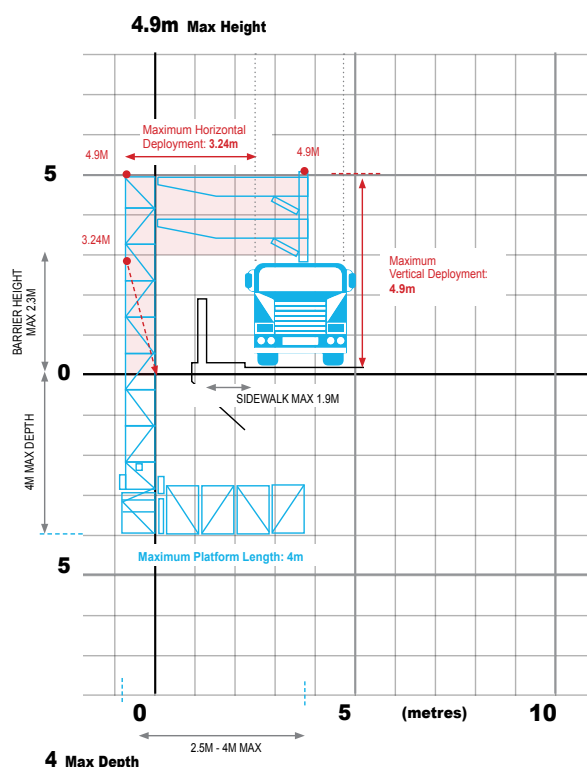

Additional Equipment

- Generator 6KVA (silenced)



UBM 10

www.dubu.net.au

Down Under Bridge Units Pty Ltd

P: 0488 020 070

E: info@dubu.net.au

ABN: 13 622 334 990

P: PO Box 239 West Burleigh QLD 4219

A: 3 Rudman Parade, Burleigh Heads QLD 4220

Under Bridge Maintenance Unit




4-7 Metre Moog Light Weight Platform

UNIT NUMBER: UBM 4

General Specs

Platform length	4 - 7 m
Max lowering depth	5 m
Max vertical height	6 m
Max horizontal width	3.2 m
Width of platform	1 m
Max load at end of telescopic platform	200 kg
Safe working load across platform	400 kg
Rotation of platform	180°
Set up width required on bridge	2.3 m
Travelling height (stowed)	3.75 m
Travelling width	2.3 m
Travelling length	8 m
Overall weight (approx)	6,500 kg
Dual control truck	No
Deployment side	left only
Outriggers	Yes
Side walk extension	No

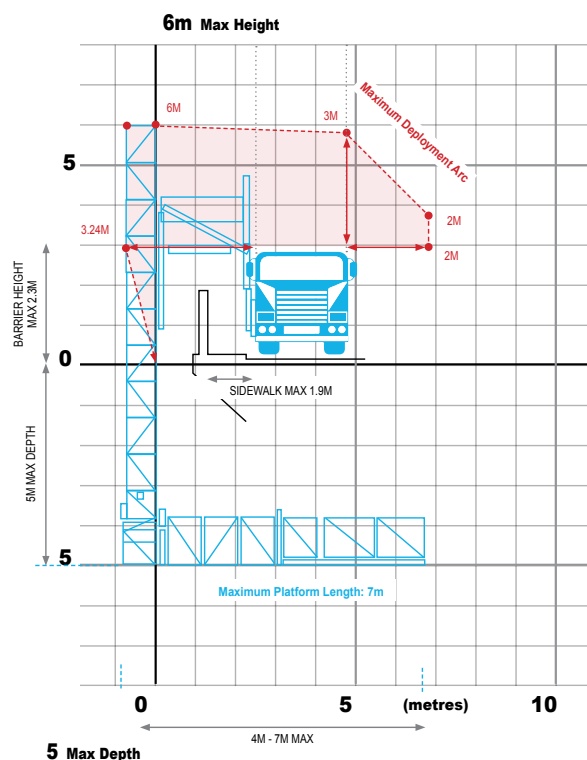

Additional Equipment

- Generator 6KVA (silenced)
- Screw Compressor 100CFM



UBM 4

www.dubu.net.au

Down Under Bridge Units Pty Ltd

P: 0488 020 070

E: info@dubu.net.au

ABN: 13 622 334 990

P: PO Box 239 West Burleigh QLD 4219

A: 3 Rudman Parade, Burleigh Heads QLD 4220

Under Bridge Maintenance Unit




4-7 Metre Moog Platform

UNIT NUMBER: UBM 6

General Specs

Platform length	7 m
Max lowering depth	5.5 m
Max vertical height	6 m
Max horizontal width	3.2 m
Width of platform	1 m
Max load at end of telescopic platform	200 kg
Safe working load across platform	400 kg
Rotation of platform	180°
Set up width required on bridge	2.5 m
Travelling height (stowed)	3.75 m
Travelling width	2.5m
Travelling length	8.1 m
Overall weight (approx)	9,400 kg
Dual control truck	Yes
Deployment side	left and right
Outriggers	No
Side walk extension	No

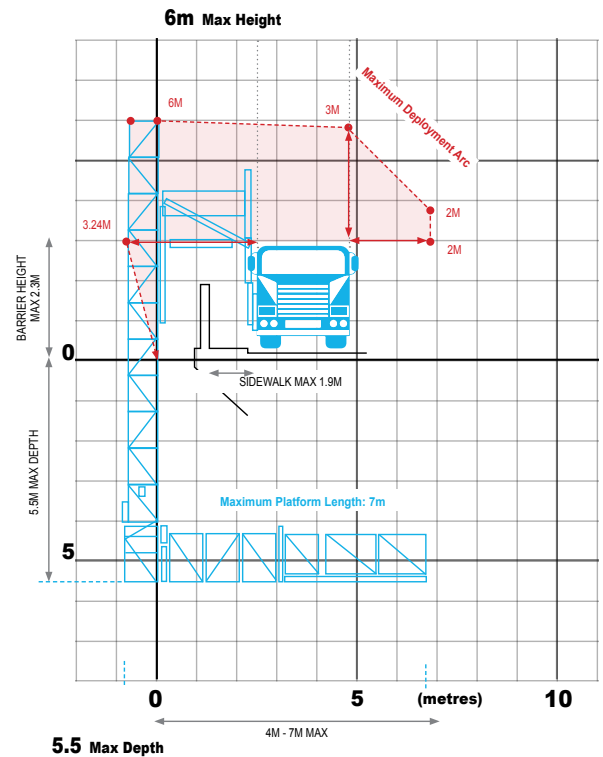

Additional Equipment

- Generator 6KVA (silenced)



UBM 6

www.dubu.net.au

Down Under Bridge Units Pty Ltd

P: 0488 020 070

E: info@dubu.net.au

ABN: 13 622 334 990

P: PO Box 239 West Burleigh QLD 4219

A: 3 Rudman Parade, Burleigh Heads QLD 4220

Under Bridge Maintenance Unit




4-7 Metre Moog Industrial Platform

UNIT NUMBER: UBM 2

General Specs

Platform length	7 m
Max lowering depth	5 m
Max vertical height	6 m
Max horizontal width	3.2 m
Width of platform	1 m
Max load at end of telescopic platform	200 kg
Safe working load across platform	400 kg
Rotation of platform	180°
Set up width required on bridge	2.5 m
Overall height	3.75 m
Travelling width	2.5 m
Travelling length	8 m
Overall weight (approx)	15,000 kg
Dual control truck	Yes
Deployment side	left and right
Outriggers	No
Side walk extension	No

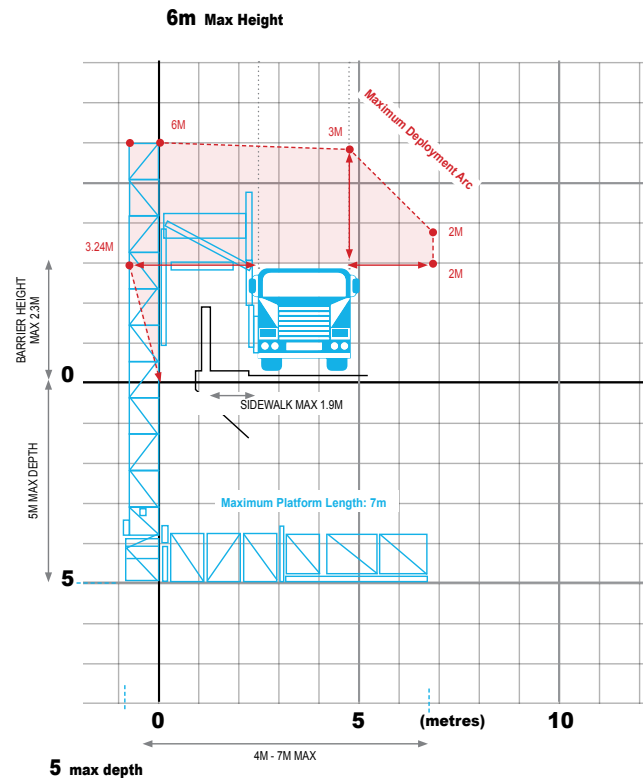

Additional Equipment

- Generator 6KVA (silenced)
- Screw Compressor 100CFM
- Pressure Cleaner 3500psi
- Water Tank - Capacity to carry 2000L



UBM 2

www.dubu.net.au

Down Under Bridge Units Pty Ltd

P: 0488 020 070

E: info@dubu.net.au

ABN: 13 622 334 990

P: PO Box 239 West Burleigh QLD 4219

A: 3 Rudman Parade, Burleigh Heads QLD 4220

Under Bridge Maintenance Unit




5 - 9 Metre Moog Industrial Platform

UNIT NUMBER: UBM 9

WITH DUAL CONTROL OPERATION AND SIDE WIDTH EXTENSION

General Specs

Platform length	9 m
Max lowering depth	6 m
Max vertical height	6.5 m
Max horizontal width	4.3 m
Width of platform	1.1 m
Max load at end of telescopic platform	200 kg
Safe working load	400 kg
Rotation of platform	180°
Set up width required on bridge	2.5 m
Travelling height (stowed)	4.5 m
Travelling width	2.5 m
Travelling length	9.1 m
Overall weight (approx)	24,500 kg
Dual control truck	Yes
Deployment side	left and right
Outriggers	No
Side walk extension	Left side only

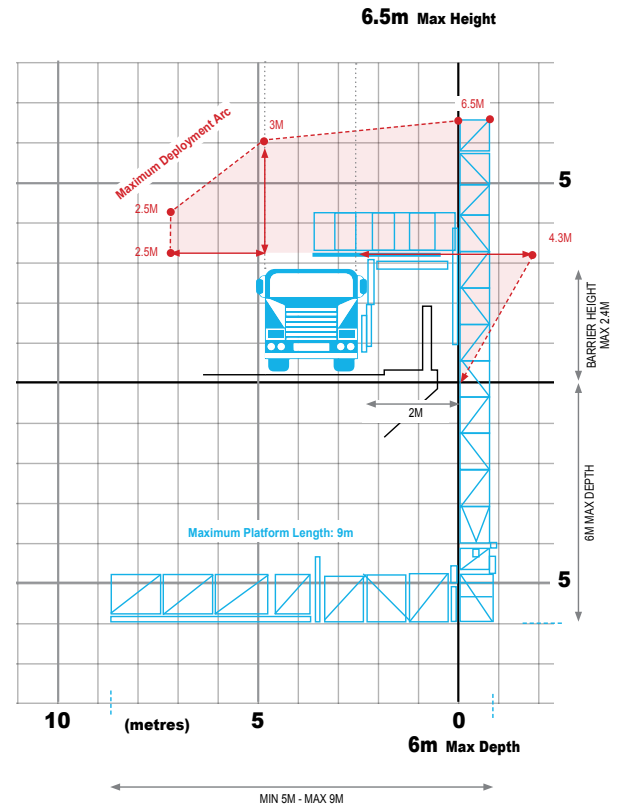

Additional Equipment

- Generator 6KVA (silenced)
- Screw Compressor 100CFM
- Pressure Cleaner 3500psi
- Water Tank - Capacity to carry 1000L



UBM 9

www.dubu.net.au

Down Under Bridge Units Pty Ltd

P: 0488 020 070

E: info@dubu.net.au

ABN: 13 622 334 990

P: PO Box 239 West Burleigh QLD 4219

A: 3 Rudman Parade, Burleigh Heads QLD 4220

Under Bridge Maintenance Unit


6 - 10.5 Metre Barin Industrial Platform



UNIT NUMBER: UBM 1

General Specs

Platform length	10.5 m
Max lowering depth	6 m
Width of platform	1.2 m
Max load at end of telescopic platform	250 kg
Safe working load across platform	500 kg
Rotation of platform	180°
Set up width required on bridge	2.5 m
Travelling height (stowed)	4 m
Travelling width	2.5 m
Travelling length	8.8 m
Overall weight (approx)	21,500 kg
Dual control truck	Yes
Deployment side	left only
Outriggers	Yes
Side walk extension	No

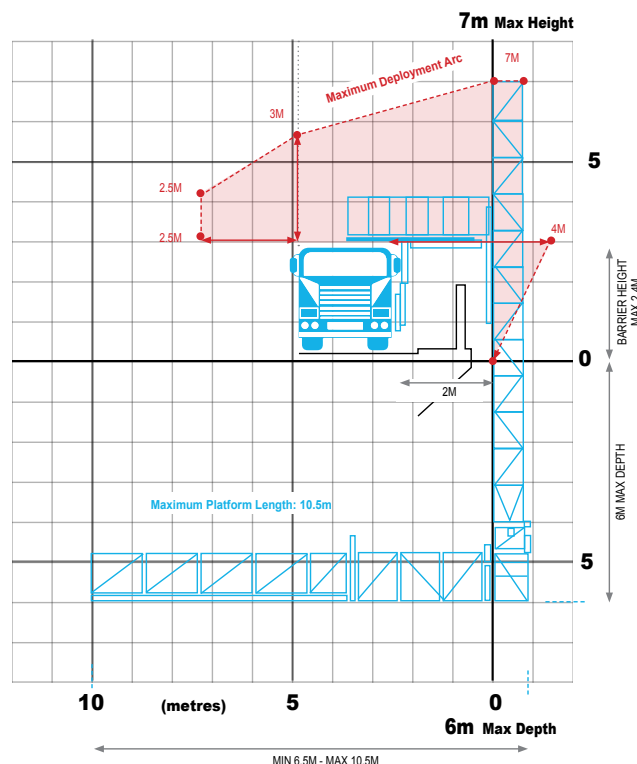

Additional Equipment

- Generator 6KVA (silenced)
- Screw Compressor 100CFM
- Pressure Cleaner 3500psi
- Water Tank - Capacity to carry 2000L



UBM 1

www.dubu.net.au

Down Under Bridge Units Pty Ltd

P: 0488 020 070

E: info@dubu.net.au

ABN: 13 622 334 990

P: PO Box 239 West Burleigh QLD 4219

A: 3 Rudman Parade, Burleigh Heads QLD 4220

Under Bridge Maintenance Unit




7 - 13 Metre Barin Industrial Platform

UNIT NUMBER: UBM 11

General Specs

Platform length	7-13 m
Max lowering depth	8.4 m
Max vertical height	9 m
Max horizontal width	6 m
Width of platform	1.2 m
Max load at end of telescopic platform	300 kg
Safe working load across platform	500 kg
Rotation of platform	180°
Set up width required on bridge	2.5 m
Travelling height (stowed)	4 m
Travelling width	2.5 m
Travelling length	11.7 m
Overall weight (approx)	26,000 kg
Dual control truck	No
Deployment side	left only
Outriggers	Yes
Side walk extension	Yes

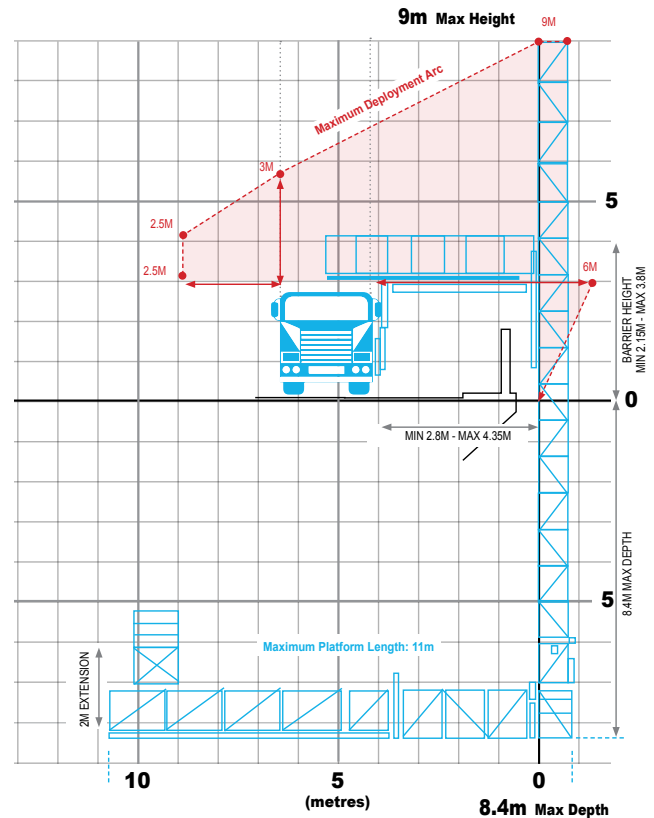

Additional Equipment

- Generator 6KVA (silenced)
- Screw Compressor 100CFM
- Pressure Cleaner 3500psi
- Water Tank - Capacity to carry 1000L



UBM 11



www.dubu.net.au

Down Under Bridge Units Pty Ltd

P: 0488 020 070

E: info@dubu.net.au

ABN: 13 622 334 990

P: PO Box 239 West Burleigh QLD 4219

A: 3 Rudman Parade, Burleigh Heads QLD 4220

Under Bridge Maintenance Unit




7-14 Metre Moog Industrial Platform

UNIT NUMBER: UBM 5

WITH DUAL CONTROL OPERATION AND SIDE WIDTH EXTENSION

General Specs

Platform length	7 - 14 m
Max lowering depth	7.2 m
Max vertical height	7.4 m
Max horizontal width	4.6 m
Width of platform	1.2 m
Max load at end of telescopic platform	250 kg
Safe working load across platform	500 kg
Rotation of platform	180°
Set up width required on bridge	2.5 m
Travelling height (stowed)	4 m
Travelling width	2.5 m
Travelling length	10.25 m
Overall weight (approx)	21,500 kg
Dual control truck	Yes
Deployment side	left and right
Outriggers	No
Side walk extension	Yes

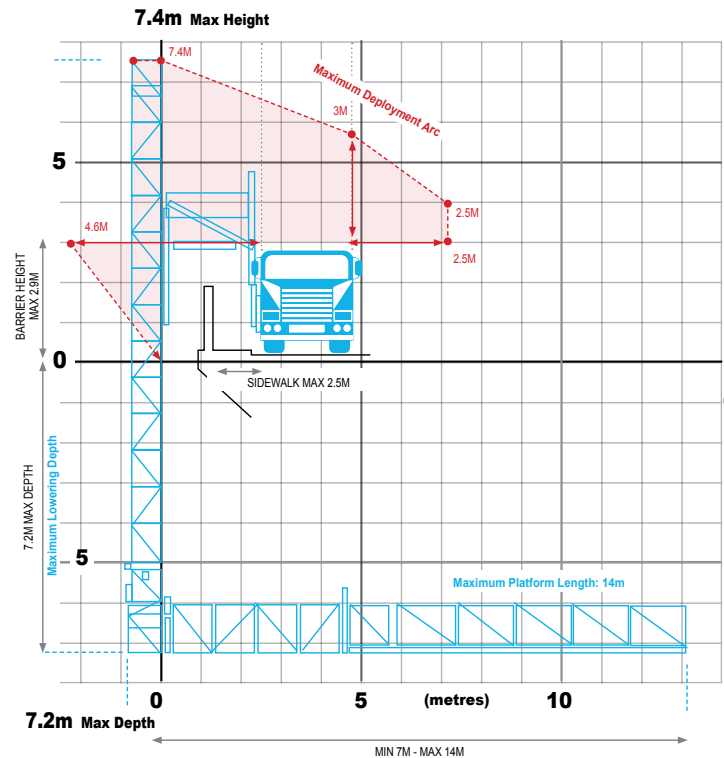

Additional Equipment

- Generator 6KVA (silenced)
- Screw Compressor 100CFM
- Pressure Cleaner 3500psi
- Water Tank - Capacity to carry 1000L



UBM 5

www.dubu.net.au

Down Under Bridge Units Pty Ltd

P: 0488 020 070

E: info@dubu.net.au

ABN: 13 622 334 990

P: PO Box 239 West Burleigh QLD 4219

A: 3 Rudman Parade, Burleigh Heads QLD 4220

Under Bridge Maintenance Unit




11-13 Metre Moog Industrial Platform

UNIT NUMBER: UBM 7 & 8

General Specs

Platform length	11-13 m
Max lowering depth	7.2 m
Max vertical height	8 m
Max horizontal width	4 m
Width of platform	1.2 m
Max load at end of telescopic platform	250 kg
Safe working load across platform	500 kg
Rotation of platform	180°
Set up width required on bridge	2.5 m
Travelling height (stowed)	4 m
Travelling width	2.5 m
Travelling length	10.5 m
Overall weight (approx)	23,000 kg
Dual control truck	No
Deployment side	left and right
Outriggers	No
Side walk extension	No

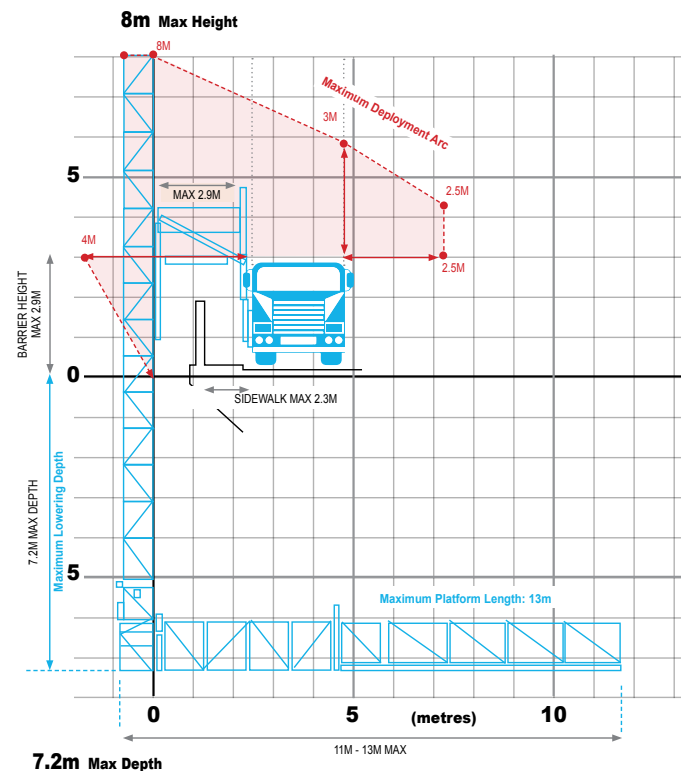

Additional Equipment

- Generator 6KVA (silenced)
- Screw Compressor 100CFM
- Pressure Cleaner 3500psi
- Water Tank - Capacity to carry 1000L



UBM 7

www.dubu.net.au

Down Under Bridge Units Pty Ltd

P: 0488 020 070

E: info@dubu.net.au

ABN: 13 622 334 990

P: PO Box 239 West Burleigh QLD 4219

A: 3 Rudman Parade, Burleigh Heads QLD 4220

Under Bridge Inspection Unit




18 Metre Cella Telescopic Bucket

UNIT NUMBER: UBI 1 & 2

General Specs

Horizontal Range	16 m
Horizontal Under Bridge Range	7 m
Max lowering depth	16 m
Max working height	18 m
Bucket Capacity	2 man bucket
Max load at end of telescopic bucket	200 kg
Rotation of platform	360°
Set up width required on bridge	3.5 m
Travelling height (stowed)	3.45 m
Overall weight (approx)	12,500 kg
Dual control truck	No
Deployment side	left / right and rear
Outriggers	Yes
Side walk extension	No

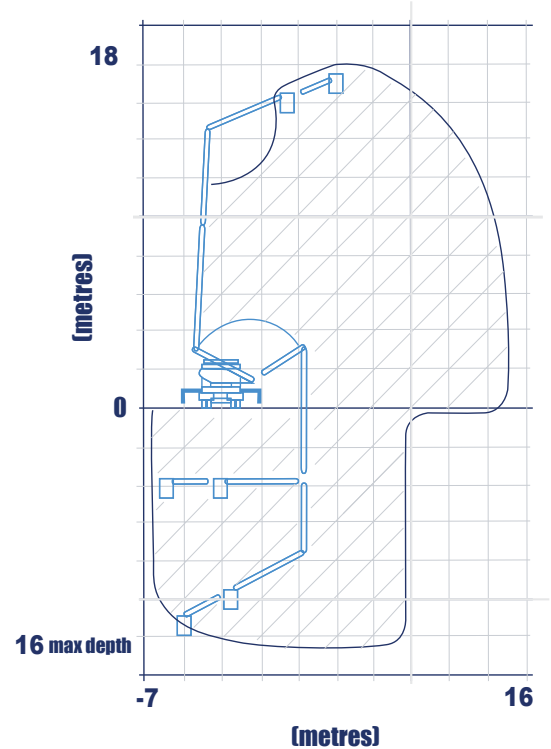

Additional Equipment

- Generator 6KVA (silenced)



UBI 2

www.dubu.net.au

Down Under Bridge Units Pty Ltd

P: 0488 020 070

E: info@dubu.net.au

ABN: 13 622 334 990

P: PO Box 239 West Burleigh QLD 4219

A: 3 Rudman Parade, Burleigh Heads QLD 4220

Under Bridge Inspection Unit




16 Metre Moog Telescopic Bucket

UNIT NUMBER: UBI 3

General Specs

Horizontal Under Bridge Range	13 m
Max lowering depth	16 m
Max working height	16 m
Bucket Capacity	2 man bucket
Max load at end of telescopic bucket	250 kg
Rotation of platform	180°
Set up width required on bridge	2.5 m
Travelling height (stowed)	4 m
Overall weight (approx)	22,500 kg
Dual Control Truck	No
Deployment Side	left / right and rear
Outriggers	No
Side Walk extension	Yes

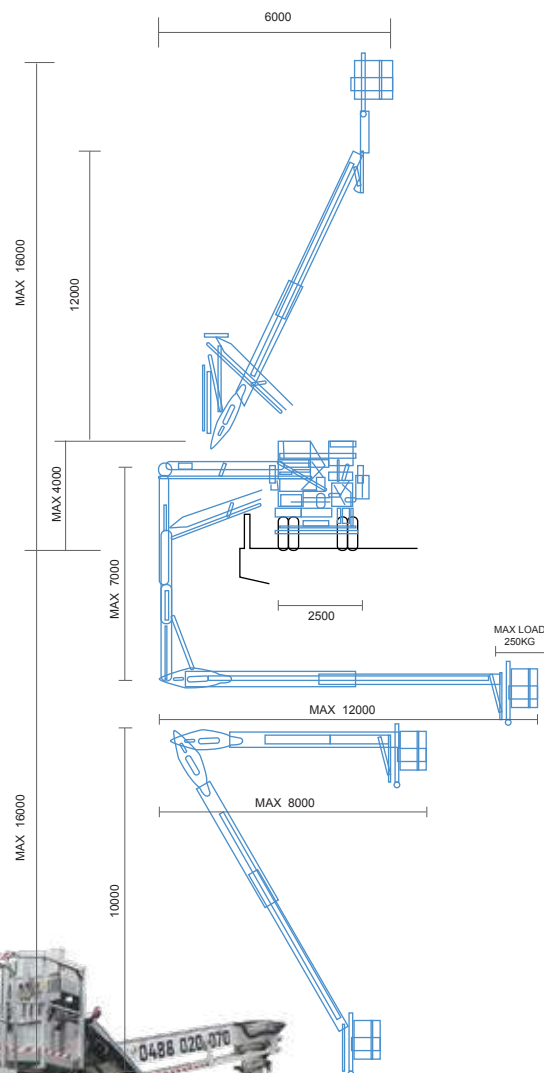

UBI 3

www.dubu.net.au

Down Under Bridge Units Pty Ltd

P: 0488 020 070

E: info@dubu.net.au

ABN: 13 622 334 990

P: PO Box 239 West Burleigh QLD 4219

A: 3 Rudman Parade, Burleigh Heads QLD 4220